


RUBBER

USO APPLICATIONS

Adecuada para agua caliente mezclada con vapor y fluidos calientes no corrosivos. Especialmente indicado para operaciones de limpieza y lavado con lanzas manuales y conexiones flexibles de calderas con termoconvertidores.

Suitable for delivery of hot water mixed with steam and non corrosive hot fluids. Particularly indicated for cleaning and washing operations with hand lances; as flexible connection hoses of boilers with thermoconverters.

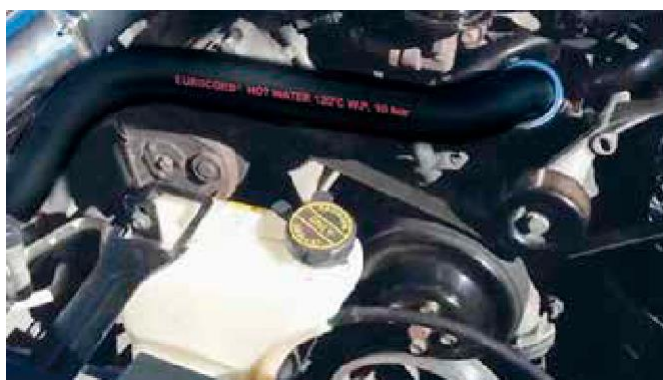

ESTRUCTURA BODY

A Capa interior Tube	Lisa en caucho EPDM de color negro. EPDM rubber.
B Refuerzos Reinforcement	Textiles sintéticos. High tensile synthetic textile.
C Capa exterior Cover	Caucho EPDM de color negro resistente al calor, a los agentes atmosféricos y al envejecimiento. Heat, ozone and weather resistant, EPDM rubber.
Superficie Surface	Lisa con impresión de tela. Smooth with fabric impression.

mm	mm	bar	bar	bar	gr/mt	mm	m
10	20	10	30	-	346	100	40
12	22	10	30	-	392	120	40
13	23	10	30	-	415	130	40
15	25	10	30	-	461	150	40
16	26	10	30	-	484	160	40
17	27	10	30	-	507	170	40
18	28	10	30	-	529	180	40
20	30	10	30	-	575	200	40
22	32	10	30	-	621	225	40
25	35	10	30	-	667	250	40
28	38	10	30	-	736	280	40
30	41	10	30	-	897	300	40
32	45	10	30	-	1162	320	40
35	48	10	30	-	1260	350	40
38	51	10	30	-	1329	380	40
40	54	10	30	-	1423	400	40
45	61	10	30	-	1864	450	40
50	66	10	30	-	1951	510	40
60	76	10	30	-	2391	600	40

ABRAZADERAS Y COLLARES DE APRIETE RECOMENDADOS RECOMMENDED CLAMP/COLLAR

STF - Abrazaderas de tornillo Hose clamps with screw (pag. 204-207)
STC - Abrazaderas con perno Hose clamps with bolt (pag. 208-210)



NORMAS NORMS:
ISO 1307

MARCADOR MARKING:
EUROCORD® HOT WATER 120°C W.P. 10 BAR

EMBALAJE BOX:
EMBALAJE EN POLIETILENO TRANSPARENTE
PACKAGING IN TRANSPARENT POLYETHYLENE

-40°C / +125°C
-40°F / +257°F